
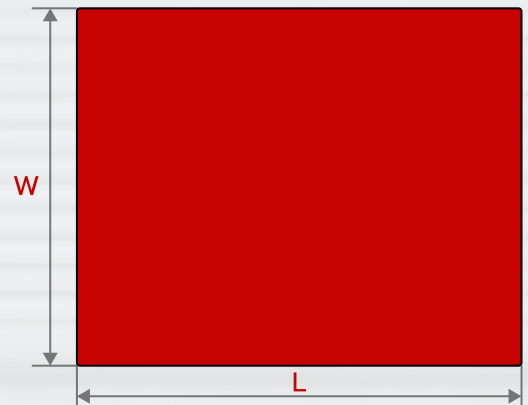


โต๊ะยกปรับระดับ ท่าพิเศษ

LOW PROFILE ELECTRIC LIFT TABLE

HY SERIES

- รับน้ำหนัก 1 ตัน / 1.5 ตัน / 2 ตัน
- ยกต่ำสุด 85-105 มม.
- ยกสูงสุด 860-870 มม.
- เวลาในการยกขึ้น-ลง 25 – 30 วินาที
- กล่องควบคุม 24V พร้อมปุ่มขึ้น-ลง และปุ่มหยุดฉุกเฉิน
- อุปกรณ์และชุดควบคุมไฟฟ้าอยู่ด้านนอก
- เหมาะสำหรับงานที่ต้องการโหลดต่ำเป็นพิเศษ
- สามารถปรับระดับแพลตฟอร์มต่ำได้ โดยไม่ต้องปรับพื้นก่อนติดตั้ง

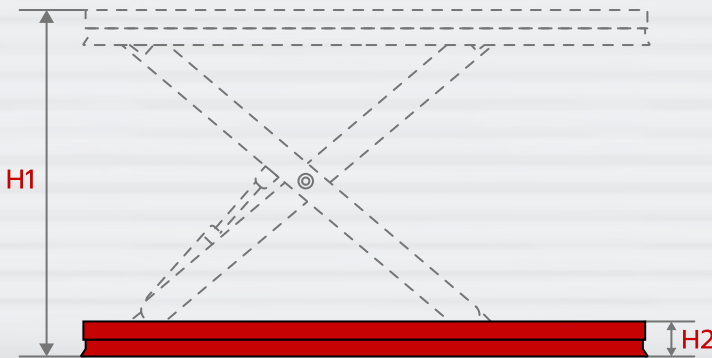

MODEL	HY1001	HY1002	HY1003	HY1004	HY1005
Capacity (kg)	1000				
Platform Width (W) (mm)	1140		800		1000
Platform Length (L) (mm)	1450	1600	1450	1600	
Hydraulic Cylinder (mm)	2				
Lifting Height (H1) (mm)	860				
Lowering Height (H2) (mm)	85				
Stroke (mm)	775				
Lift Time (sec)	25				
Power Pack	380v/50HZ, AC 0.75kw				
Net Weight (kg)	357	364	326	332	352

Note: Specification is subject to change without notice.

MODEL	HY1501	HY1502	HY1503	HY2001	HY2002
Capacity (kg)	1500			2000	
Platform Width (W) (mm)	800	1000	1200		1000
Platform Length (L) (mm)	1600				
Hydraulic Cylinder (mm)	2				
Lifting Height (H1) (mm)	870				
Lowering Height (H2) (mm)	105				
Stroke (mm)	775				
Lift Time (sec)	30				
Power Pack	380v/50HZ, AC 0.75kw			380v/50HZ, AC 2.2kw	
Net Weight (kg)	367	401	415	419	405

Note: Specification is subject to change without notice.